

Electronic Initiation Device 1

FEATURES:

- Compact, rugged design
- Lightweight
- Reusable
- High accuracy
- Fully programmable options
 - ◆ Time delays of milliseconds to hours
 - ◆ Altitude by absolute pressure
 - ◆ Speed by differential pressure
 - ◆ Shock by accelerometer
 - ◆ Sensor lockout and backup timer
- Safe-shortened output
- Device status indicator LEDs
- Powered by off-the-shelf battery (COTS)
- Extended battery life in standby mode
- Energy pulse up to 1000 mJ



EID1-TP-M/CB Pictured

Applications:


- Aerial Testing
 - ◆ Programmable parachute disreefing
 - ◆ Drogue or main parachute release
 - ◆ Multiple event sequencing
- Ground Based Initiation
- Delay On Signal
 - ◆ Switch or voltage input

GENERAL DESCRIPTION:

The **E**lectronic **I**nitiation **D**evice is a capacitive discharge device intended for use with hot bridgewire initiation devices or cartridge actuated devices, such as pyrotechnic line cutters, squibs, and standard initiators. Paired with the EID Mission Control Software, the EID unit can be programmed for planned initiation based upon selectable parameters, which include time elapses, pressures, and accelerations. Key initiation parameters are stored to internal memory in real-time and can be downloaded for review after initiation.

DESKTOP APPLICATION SOFTWARE:

- Initiation parameters programming
- Post-initiation operations review
- Pressure altitude & speed calculator tool
- Selectable display units, imperial or metric
- RS232 serial communication
- MS .Net Framework version 3.5 or newer
- Windows® XP/Vista or newer compatible

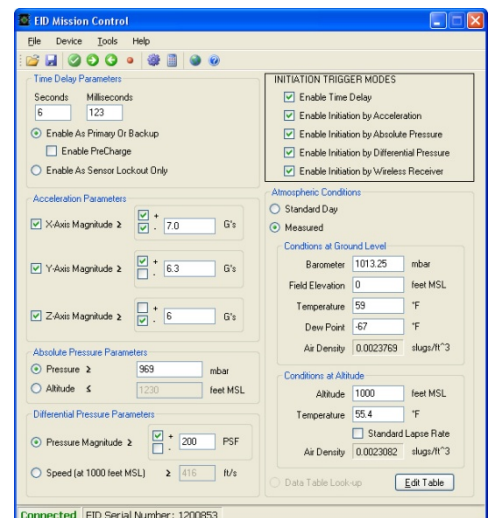

SPECIFICATIONS:

ELECTRICAL

Power Supply: 3 volt Li battery, commercial-off-the-shelf (COTS)
 Size 1/2A (CR2) standard: capacity ~850 mAh
 Size 2/3A (C123) optional^{1,2}: capacity ~1500 mAh
 Reverse polarity protected
 6 volt Absolute Maximum Rating

Current Draw: Disarmed: < 50 µA nominal
 Running: 40 mA nominal average
 Indicating: LEDs upto 70 mA average

ENVIRONMENTAL

Temperature: -40°C to 60°C Operating
 -55°C to 85°C Storage (w/o Battery)

Humidity: 15 - 85% RH, non-condensing

MECHANICAL

BC Connector(s): MIL-C-26482, PT02A10-6S
 Mates with PT06E10-6P

Dimensions: Varies by model options, see *Device Descriptions*
 Typical model example: EID1-TP-M/CB (as pictured)
 5.53" x 1.52" x 1.22" [14.0 cm x 3.8 cm x 3.1 cm]

Weight: < 8 oz. nominal (225 g), including battery

INPUT / OUTPUT SIGNALS

Output Pulse: 2-lead, relay controlled (100G shock rated)
 30 volts typical
 Energy burst up to 1000 mJ^{1,2}

Output Arming: Enabled via jumper or n/o switch contacts

Output Shorting: Terminals shorted via jumper or n/o switch contacts

S-output³: Optically isolated, n/o switch control, optional²

S-input: 2-lead n/o switching detection for Triggering

M-input: Magnetic n/c switching detection for Arming

V-input³: 2-lead polarized voltage detection for Triggering
 Optically isolated, 5-30v ±10% standard
 Optically isolated, 3-12v ±15% optional²

SB-input: Manual slide switch control
 Configurable² for power, arming, or triggering

Communication: RS-232 protocol via RJ45 jack and adapter
 Cable and adapter supplied

INITIATION TRIGGER MODES

Time Delay: Set in seconds and milliseconds
 Use as primary trigger, Or to lockout other enabled triggers
 Typical accuracy 0.01%


Absolute Press: Set trigger as pressure or altitude
 Range: 150 to 1150 kPa
 Typical accuracy 0.1% full scale

Differential Press: Set trigger as pressure or speed
 Range: ±3.6 psid
 Accuracy rated to ±5% full scale

Acceleration: Programmable G-force trigger
 Range: ±8 Gs
 Typical accuracy 1% full scale

Wireless: Paired transmitter and receiver(s)
 Range: 300 feet
 Typical actuation time ~10 ms

PART NUMBER QUICK REFERENCE

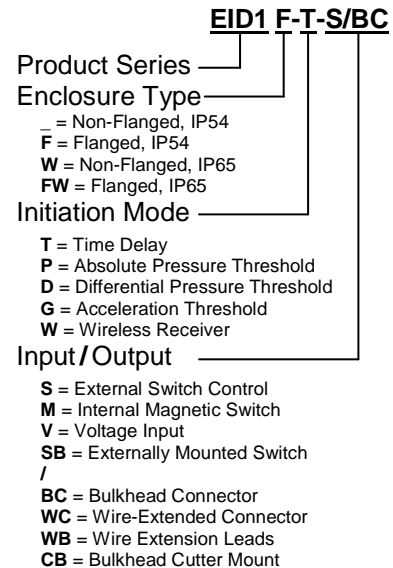

*** Not all options above can be combined on every model ***

Additional Customization Options²:


- 2BC models: 2nd connector to separate output from input signals
- Water resistant enclosure IP65, versus standard IP54

¹ Battery size 2/3A option decreases output pulse capability to ~450 mJ

² Optional items selected at time of order

³ S-output and V-input share one connector; cannot be ordered together

PART NUMBER DESCRIPTION:

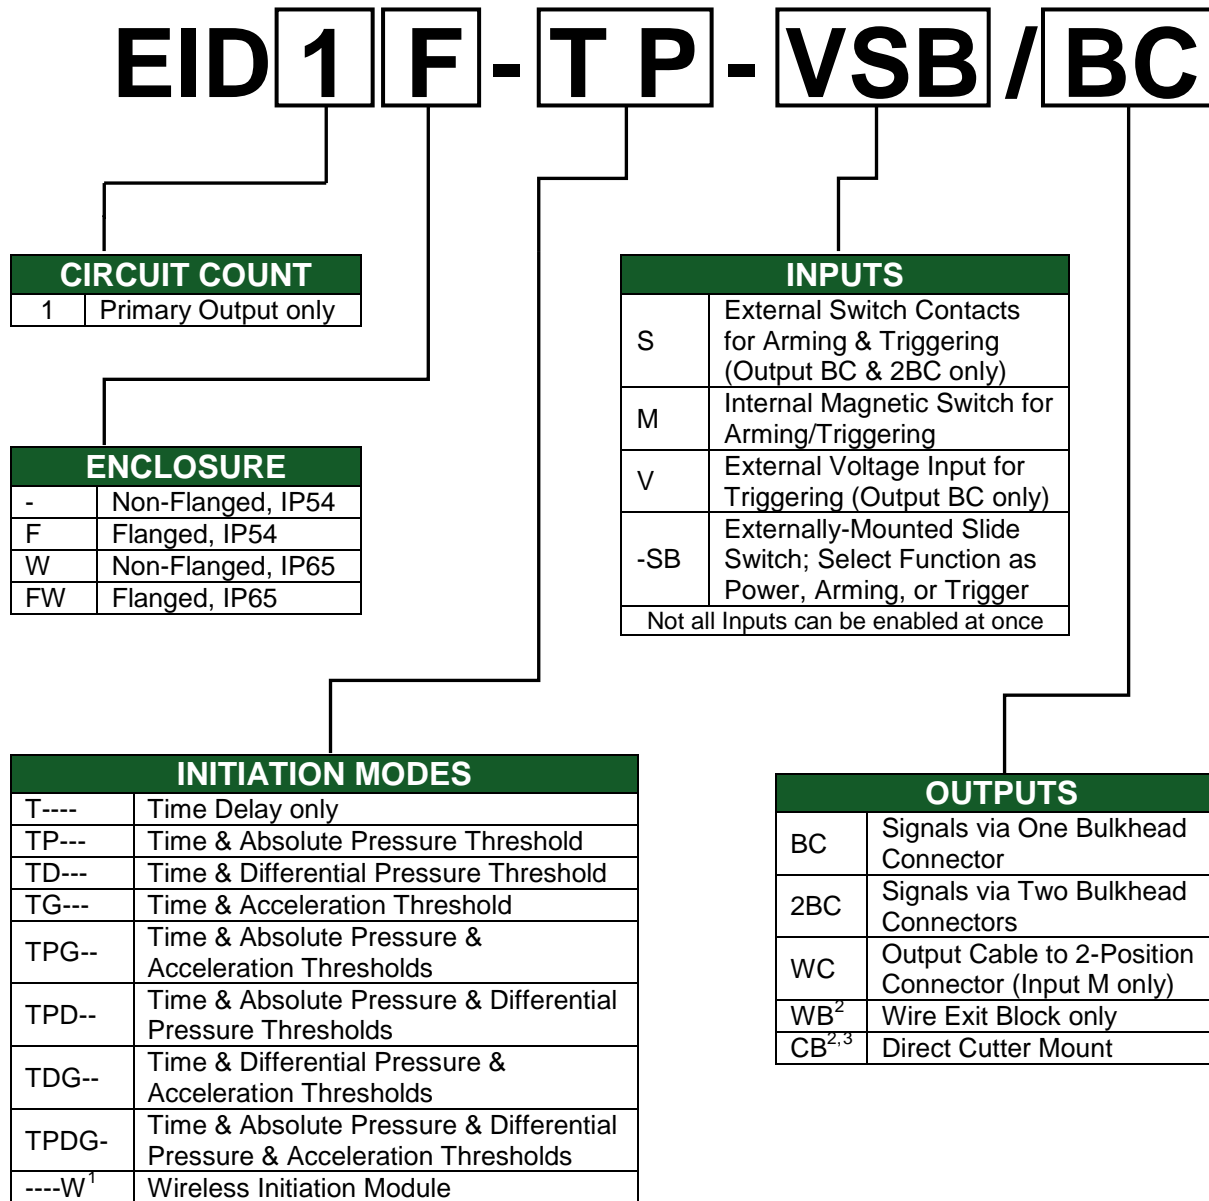

¹ Option is available when pairing EID units with wireless transmitter and receiver modules.

² Option alone may not be IP rated. Final connections or sealing measures by user may be necessary.


³ Cutter mounts available for Model G2 and Model G4 cutters by Roberts Research Laboratory.

HARDWARE PINOUTS

-S/BC model with single connector (standard):

INPUT/OUTPUT CONNECTOR


- Contact A: Positive terminal for Arm switch
- Contact B: Negative terminal for Arm switch
- Contact C: Positive terminal for Output
- Contact D: Negative terminal for Output
- Contact E: Positive terminal for Start Trigger switch
- Contact F: Negative terminal for Start Trigger switch

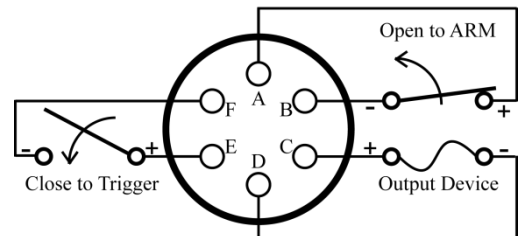

-S/2BC model with secondary connector (optional):


INPUT CONNECTOR

- Contact A: Positive terminal for Arm switch
- Contact B: Negative terminal for Arm switch
- Contact C: Negative terminal of Battery
- Contact D: Negative terminal for power ground
- Contact E: Positive terminal for Start Trigger switch
- Contact F: Negative terminal for Start Trigger switch

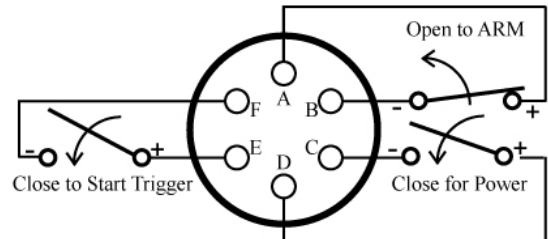


OUTPUT CONNECTOR

- Contact A: Positive terminal for relay Arm switch
- Contact B: Negative terminal for relay Arm switch
- Contact C: Positive terminal for Output
- Contact D: Negative terminal for Output
- Contact E: Positive terminal for Output shorting
- Contact F: Negative terminal for Output shorting

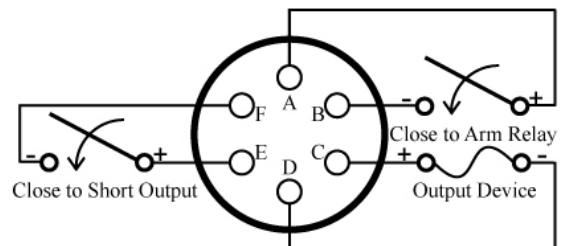


CIRCUIT LAYOUT

- Connector and sensor locations (v1.2x)
- All shown here, only ordered options are equipped

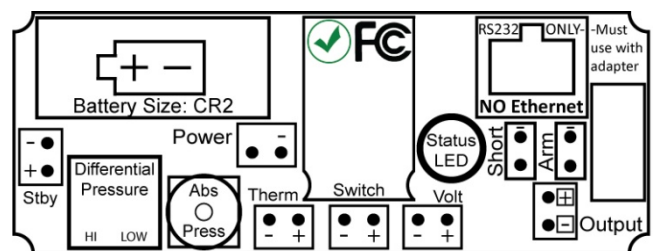


DEVICE DESCRIPTIONS: Dimensions in inches [millimeters] unless otherwise noted.

EID1 Enclosure without Flange

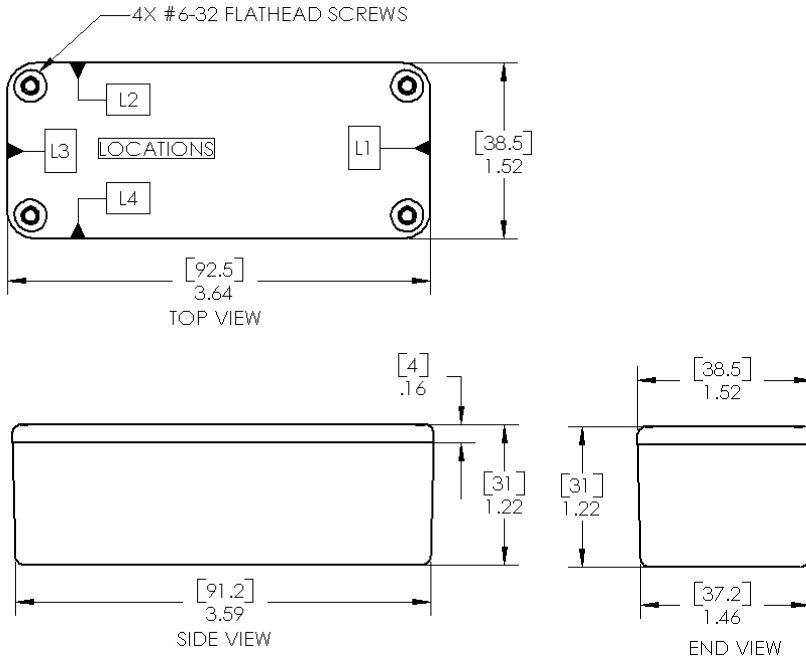


EID1 Enclosure with Flange

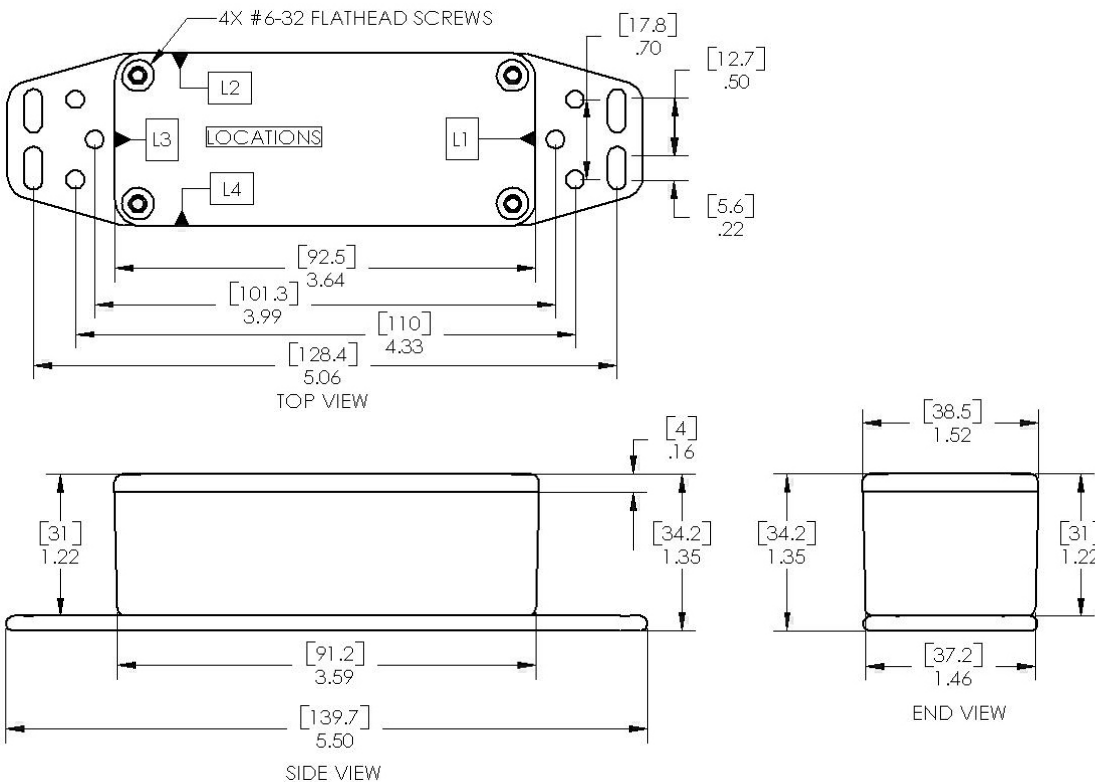


SB – Accessory block for mounting external slide switch

SB2-MS12: Standard position at location L2; L3 optional

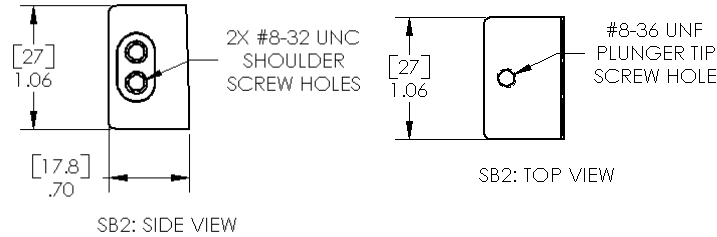


BC – Accessory block for mounting bulkhead connector

BC2-10: Standard position at location L1; L3 for 2nd BC only

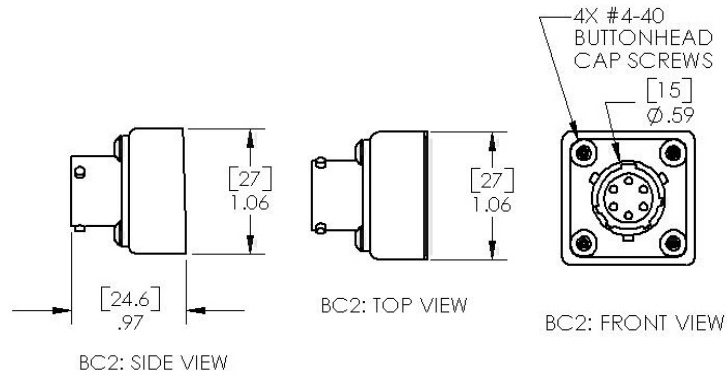


WB – Accessory block for passing a wire through enclosure wall

WB2-AWG20: Standard position at location L1; L4 optional




CB – Accessory block for direct mounting cutter to enclosure

CB2-RRLG4 & CB3-RRLG4: Standard position at location L1 only

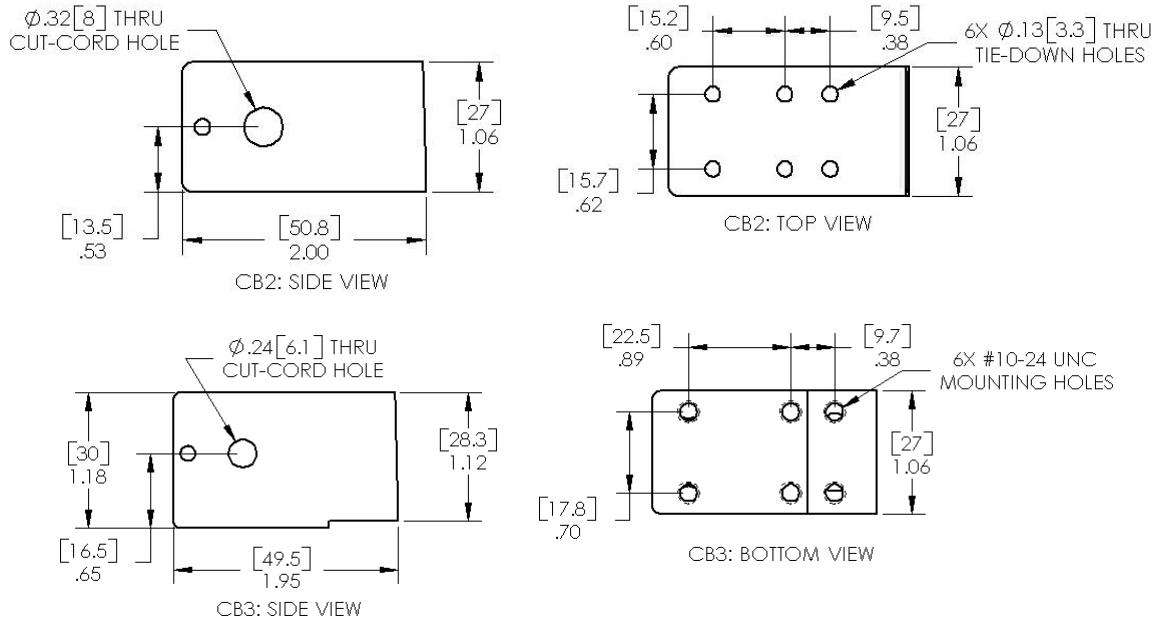


PB – Accessory block for differential pressure port connection

PB1-DP7025: Standard position at location L4 only

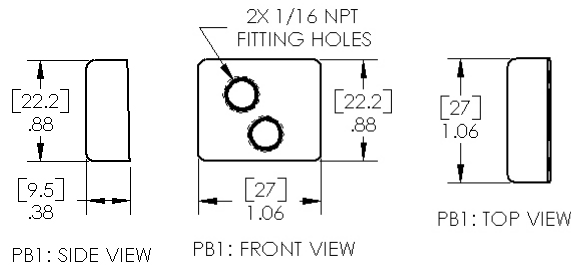


RFLC – Accessory block to enclose wireless radio module


RFLC1: Standard position on top of lid only

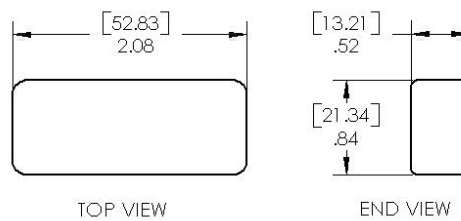


Examples of accessory blocks attached to EID1 enclosures (for reference only)
 Models EID1-xx-S/BC (BC2-10 @ L1) and EID1-xx-S/2BC (BC2-10 @ L1 & L3)

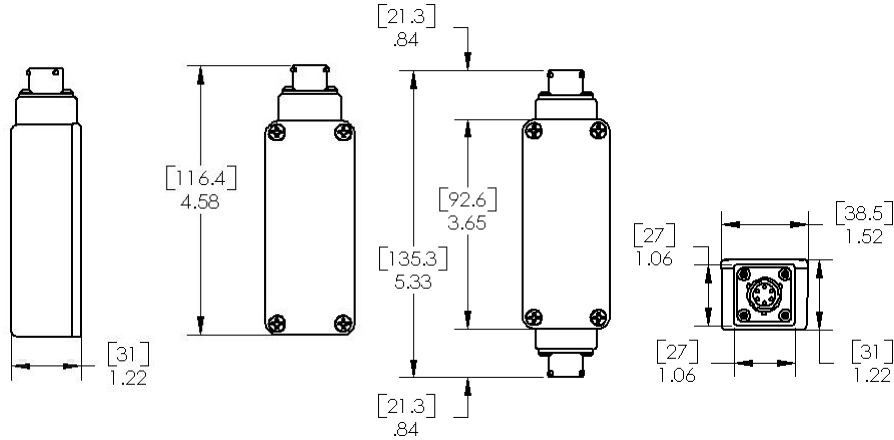


Model EID1-xW-M/CB (CB2-RRLG4 @ L1, RFLC1 on lid)

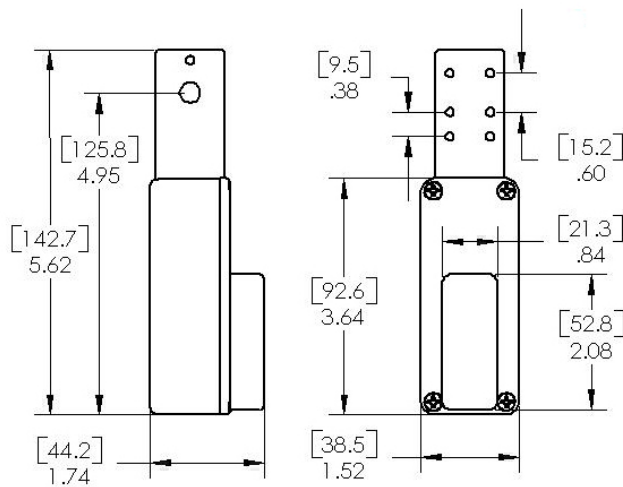

Model EID1-xx-MSB/WBCB (CB2-RRLG4 @ L1, SB2-MS12 @ L2, WB1-AWG20 @ L4)

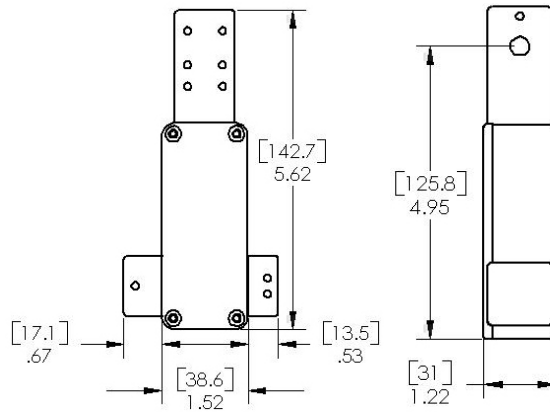

Model EID1F-TD-SSB/BC (BC2-10 @ L1, SB2-MS12 @ L2, PB1-DP7025 @ L4)

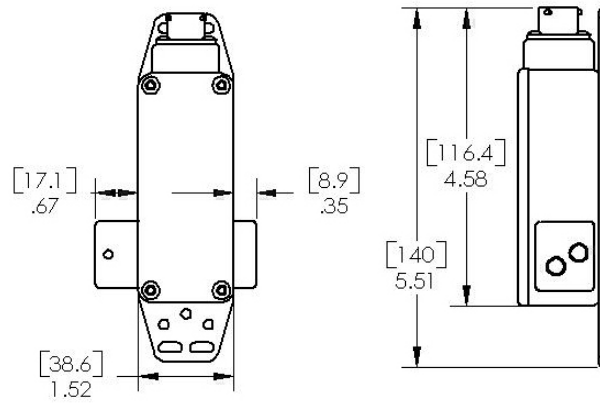

NOTES:

Important Notice

ALD Systems reserves the right to make changes to its products or to discontinue any product or service without notice, and advises customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement.

ALD Systems warrants performance of its products to the specifications applicable at the time of sale in accordance with ALD Systems' standard warranty when used properly and as directed. Testing and other quality control techniques are utilized to the extent ALD Systems deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed.

CERTAIN APPLICATIONS USING ELECTRONIC INITIATION DEVICE PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS") AND ARE NOT TO BE USED BY PERSONS UNLESS THEY ARE COMPLETELY FAMILIAR WITH SAFE PROCEDURES FOR THEIR USE, OR UNDER THE DIRECTION OF COMPETENT, EXPERIENCED PERSONS. INCLUSION OF ALD SYSTEMS' PRODUCTS IN SUCH CRITICAL APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards. ALD Systems assumes no liability for applications assistance or for customer product or system design. ALD Systems does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, or other intellectual property right of ALD Systems covering or relating to any combination, system, or process in which such products or services might be or are used. ALD Systems' publication of information regarding any third party's products or services does not constitute ALD Systems' approval, warranty or endorsement thereof.